




CX-94 SERIES: GATE LOCK

CX-94S-12LS gate lock is designed for outdoor applications. It offers exceptional performance and value with ultra low current draw, making it the ideal choice for most gating projects.

Features	
<ul style="list-style-type: none"> • 1,200 lbs. holding force • Compatible with all access / egress systems • Conduit fitting for weather resistant installation • Built-in lock sensor and relay 	<ul style="list-style-type: none"> • Field selectable 12/24 VDC operation • On board MOV power surge protection prevents damage to maglock • Lifetime warranty

MODEL		List Price
CX-94S-12LS	1,200 lbs Surface mount gate lock with lock sensor and relay	\$357.00

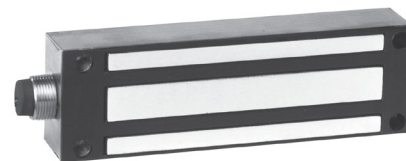

Specifications

Voltage:	12/24 VDC
Current Draw:	500mA @ 12 VDC 250mA @ 24 VDC
Temp Range:	5F to 122F (-15°C to 50°C)
Contact Rating:	Bond Sensor: 1A @ 30 VDC
Dimensions (Body):	2-1/2" H x 8" W x 1-5/8" D (63mm x 203mm x 41.5mm)

CX-95S-DH SERIES: MAGNETIC DOOR HOLDERS

CX-95S-DH Magnetic door holders controls the release and closing of commercial and public area doors. Ideal for use in apartment buildings, schools, hotels, hospitals, and offices.

Fail-safe operation, tri-volt coils, and an adjustable armature plate allow for easy and flexible installation. Camden magnetic door holders may be surface, flush, or floor mounted, with all mounting hardware included in the kit. Optional extension bars are also available.

Features	
<ul style="list-style-type: none"> • Multiple voltages: 12/24V, AC/DC, 120 VAC • Armature plate adjusts to door alignment • Two models: Surface / flush and floor mounted 	<ul style="list-style-type: none"> • 3" & 7" extension bars available • Up to 35 lbs. (16 kg) holding force • 3 year warranty

MODELS		List Price
CX-95S-DH	Magnetic Door Holder Surface / Flush Mount	\$170.00
CX-95S-DH-BK	Magnetic Door Holder Surface / Flush Mount, Black	\$182.00
CX-95S-DH-FL	Magnetic Door Holder Floor Model	\$210.00
CX-95S-DH-FL-BK	Magnetic Door Holder Floor Model, Black	\$212.00

EXTENSION BARS		List Price
CX-95S-3E	3" Extension Bar	\$28.00
CX-95S-3E-BK	3" Extension Bar, Black	\$35.00
CX-95S-7E	7" Extension Bar	\$35.00
CX-95S-7E-BK	7" Extension Bar, Black	\$42.00



Specifications

Voltage:	12/24 VDC, 120V AC
Current Draw:	55mA @ 12V AC 57mA @ 12V DC, 32mA @ 24V AC 34mA @ 24V DC, 30mA @ 120V AC
Static Hold Force:	12V AC/DC: Up to 30 lbs. 24V AC/DC: Up to 35 lbs. 120V AC: Up to 18 lbs.
Mount Options:	Surface/Flush or Floor Mount
Dimensions:	Surface and Floor Mount Magnet: 2-3/4" W x 4-5/8" L x 2-1/2" D (70mm x 116mm x 62 mm) Flush Mount Magnet: 2-3/4" W x 4-5/8" L x 1-3/4" D (70mm x 116mm x 44mm) Armature: 2-9/16" W x 2-9/16" L x 2-7/8" D (65mm x 65mm x 74mm)